


MODEL: TC14-12



Plane Chart:

Unit:(mm) Terminal type:(D1)

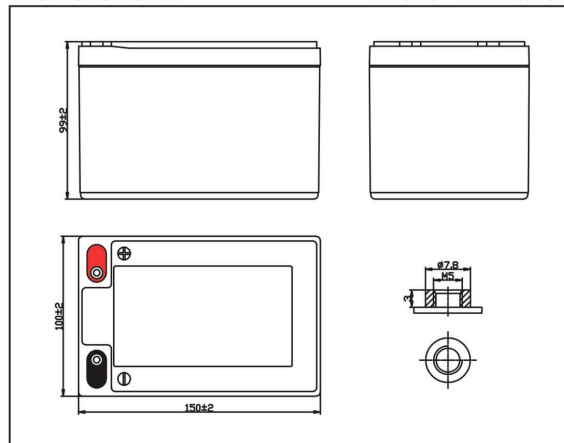


Parameter Chart:


Volts	12V	
Capacity(25 °C)	2 hours rate (6.5A)	13Ah
	10 hours rate (1.6A)	16Ah
Capacity Affected By Temperature	40 °C	102%
	25 °C	100%
	0 °C	85%
	-15 °C	70%
Residual Capacity (25 °C)	Capacity After 3 Months Storage	90%
	Capacity After 6 Months Storage	80%
	Capacity After 12 Months Storage	60%
Design cycle service life		4 years
Charge (Constant Voltage)	Cycle (25 °C)	Initial Charging Current Less Than 3.9A Voltage 14.5~14.9V
	Float (25 °C)	Charge Voltage 13.6~13.8V
Weight (Approx)		4.15Kg

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

Performance curve

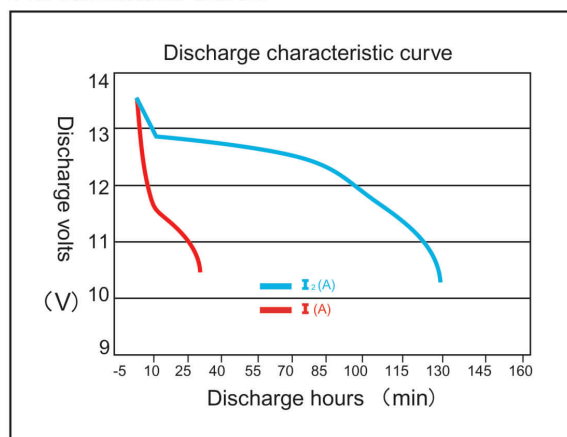

Cycle service life in relation to the depth of discharge

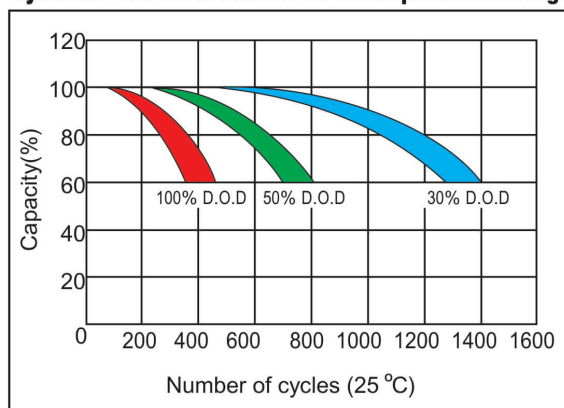

V2022