
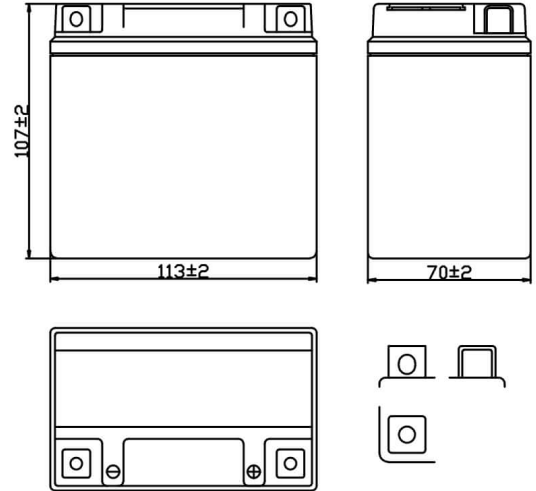


MODEL: YTZ7S-GEL



Cover	Container Bottom	Terminal	Positive Plate	Negative Plate	Separator	Electrolyte	Safety Valve	Seal Glue
ABS	ABS	Cu	PbO ₂	Pb	AGM	GEL	Rubber	Epoxy Resin

Parameter Chart


Volts	12V		
10 hours rate Capacity(25°C)	6.0Ah		
Dimension	Length	113±2mm(4.45 inch)	
	Width	70±2mm(2.76 inch)	
	Total height	106±2mm(4.17 inch)	
Terminal	C8/M5		
Weight±3%	2.02Kg(4.44 lbs)		
CCA(-18°C)	85A		
CA(25°C)	150A		

Retention of Charge Storage @25°C

1 month	97%	Directly Mounted	
3 month	90%	Directly Mounted	
6 month	80%	Current:0.6A	Constant Volts:14.8V Charging Hours:5H
12 month	60%	Current:0.6A	Constant Volts:14.8V Charging Hours:10H

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.
★The different item No. of battery can be developed according to the customer's demand

Discharge Characteristics 25°C

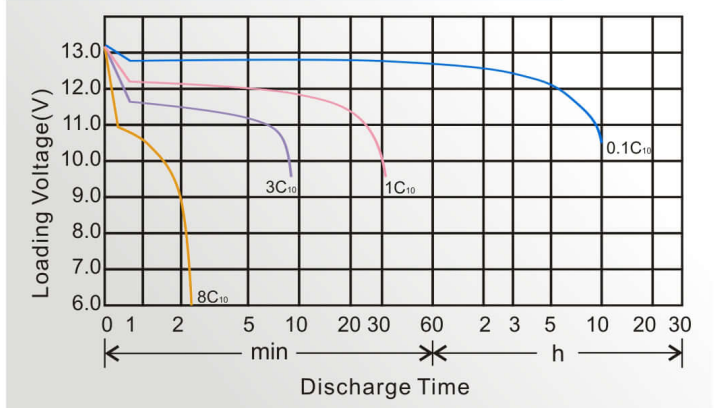

The relationship for OCV and Capacity 25°C

