
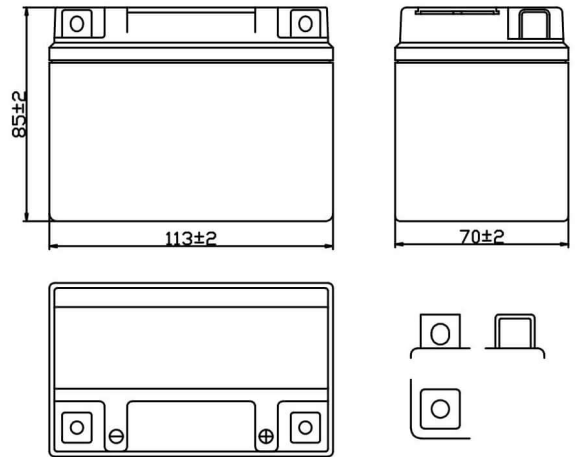


MODEL: YTX4L-GEL




Execution standards: IEC 60095-7:2019、JISD 5302:2022

Cover	Container Bottom	Terminal	Positive Plate	Negative Plate	Separator	Electrolyte	Safety Valve	Seal Glue
ABS	ABS	Cu	PbO2	Pb	AGM	GEL	Rubber	Epoxy Resin

Parameter Chart

Volts	12V
10 hours rate Capacity(25°C)	4.0Ah
Dimension	Length 113±2mm(4.45 inch)
	Width 70±2mm(2.76 inch)
	Total height 85±2mm(3.35 inch)
Terminal	C8/M5
Weight±3%	1.30Kg(2.86 lbs)
CCA(-18°C)	45A
Storage Status	Wet


The relationship for OCV and Capacity 25°C

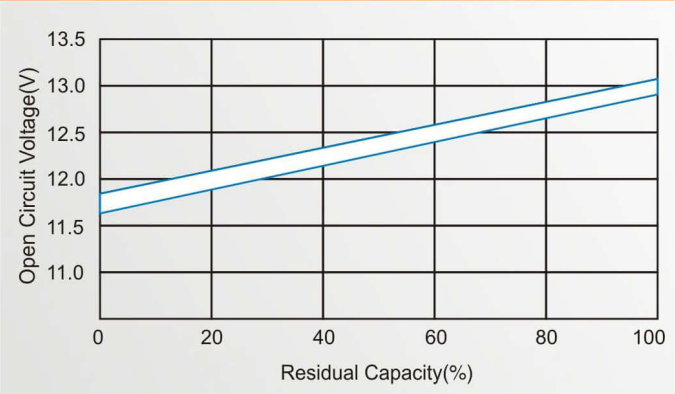

Retention of Charge Storage @25°C

1 month	97%	Directly Mounted
3 month	90%	Directly Mounted
6 month	80%	Current:0.4A Constant Volts:14.8V Charging Hours:5H
12 month	40%	Current:0.4A Constant Volts:14.8V Charging Hours:10H

Residual Capacity

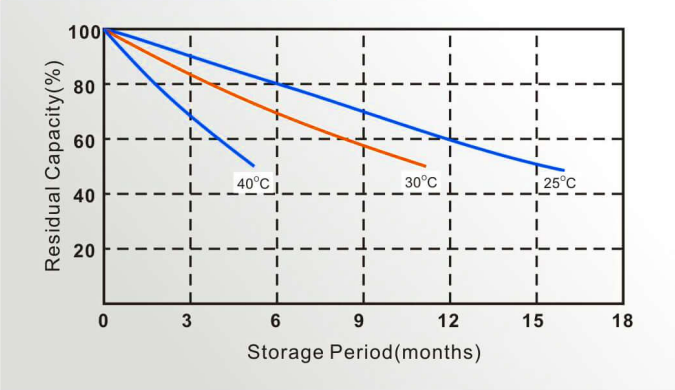

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.
★The different item No. of battery can be developed according to the customer's demand