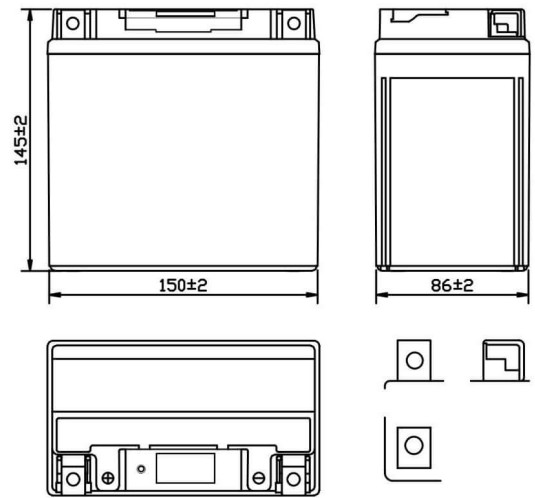



**MODEL: YTX14-GEL**


Execution standards: IEC 60095-7:2019, JISD 5302:2022

Cover	Container Bottom	Terminal	Positive Plate	Negative Plate	Separator	Electrolyte	Safety Valve	Seal Glue
ABS	ABS	Cu	PbO <sub>2</sub>	Pb	AGM	GEL	Rubber	Epoxy Resin

**Parameter Chart**

Volts	12V		
10 hours rate Capacity(25°C)	12.0Ah		
Dimension	Length	150±2mm(5.91 inch)	
	Width	86±2mm(3.39 inch)	
	Total height	145±2mm(5.71 inch)	
Terminal	Z1/M6		
Weight±3%	4.40Kg(9.68 lbs)		
CCA(-18°C)	150A		
Storage Status	Wet		

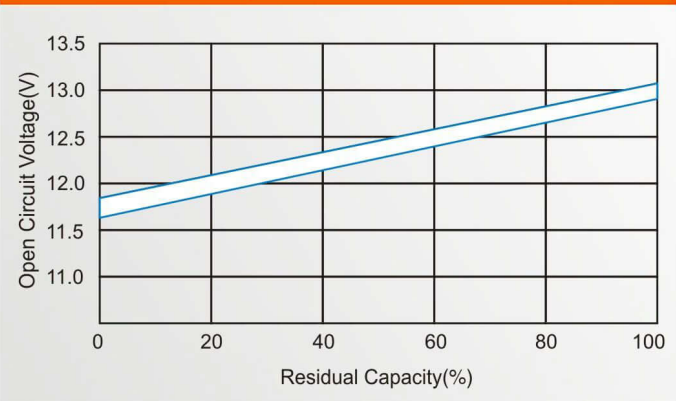**The relationship for OCV and Capacity 25°C**

**Retention of Charge Storage @25°C**

1 month	97%	Directly Mounted
3 month	90%	Directly Mounted
6 month	80%	Current: 1.2A Constant Volts: 14.8V Charging Hours: 5H
12 month	40%	Current: 1.2A Constant Volts: 14.8V Charging Hours: 10H

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.  
★The different item No. of battery can be developed according to the customer's demand

**Residual Capacity**
