
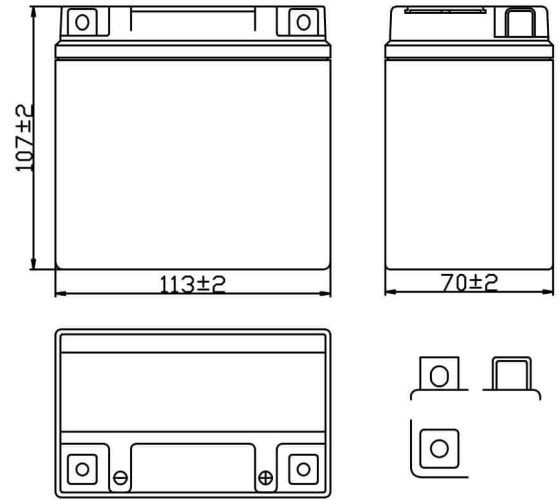


MODEL: YTX5L-GEL




Execution standards: IEC 60095-7:2019、JISD 5302:2022

Cover	Container Bottom	Terminal	Positive Plate	Negative Plate	Separator	Electrolyte	Safety Valve	Seal Glue
ABS	ABS	Cu	PbO2	Pb	AGM	GEL	Rubber	Epoxy Resin


Parameter Chart

Volts	12V
10 hours rate Capacity(25°C)	5.0Ah
Dimension	Length 113±2mm(4.45 inch)
	Width 70±2mm(2.76 inch)
	Total height 106±2mm(4.17 inch)
Terminal	C8/M5
Weight±3%	1.64Kg(3.61 lbs)
CCA(-18°C)	55A
Storage Status	Wet

The relationship for OCV and Capacity 25°C

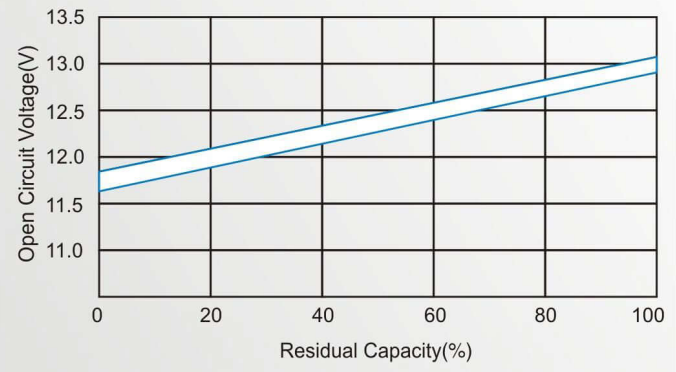

Residual Capacity

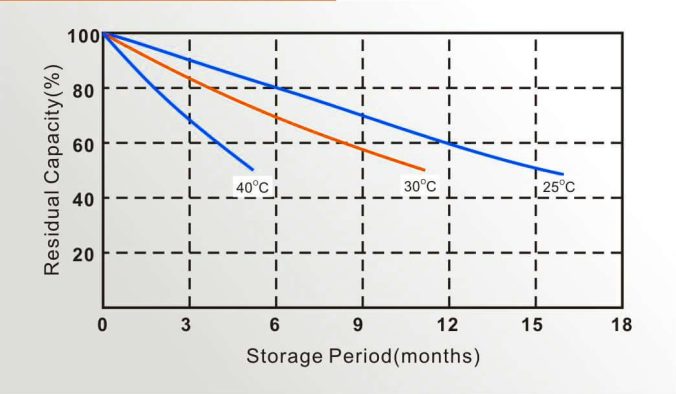

Retention of Charge Storage @25°C

1 month	97%	Directly Mounted
3 month	90%	Directly Mounted
6 month	80%	Current:0.5A Constant Volts:14.8V Charging Hours:5H
12 month	40%	Current:0.5A Constant Volts:14.8V Charging Hours:10H

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

★The different item No. of battery can be developed according to the customer's demand